Edge-corE
Powered by Accton

WA520IM-CBL-3
Extension Cable

Electrical Specification

- Frequency range : DC~6 GHz
- VSWR : 1.5 : 1 Max.@ DC~6 GHz
- Insertion loss :
  1.1 dB Max.@ DC~3 GHz / 1.6 dB Max.@ 3~6.0 GHz
- Impedance : 50 Ohms
- Cable : SmartAnt ULA 400
- Cable length : 3m (300 cm)
- Connector : N Plug x 2

Environmental & Mechanical Characteristics

- Temperature : - 40°C ~ +85°C

Supported Model

- WA6202/6202M

3m ULA 400 Typical Attenuation	
Frequency (MHz)	Attenuation (dB)
500	0.31
1000	0.48
1500	0.59
2000	0.73
2500	0.79
3000	0.87
3500	0.98
4000	1.14
4500	1.17
5000	1.20
5500	1.28
6000	1.36

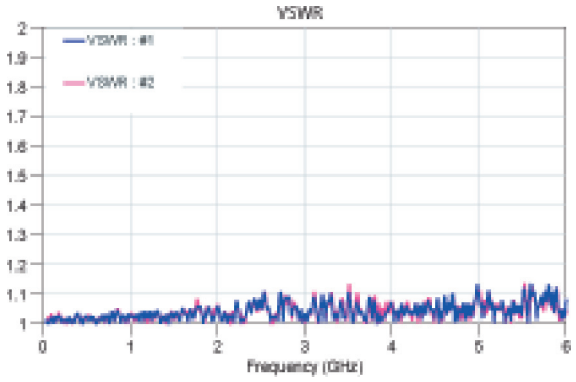

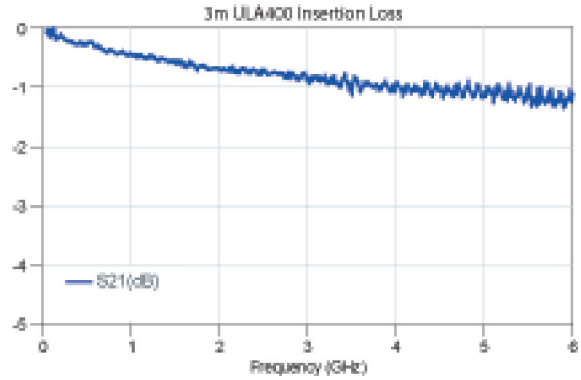

TEL 886-3-5053801
FAX 886-3-5790398
No.1, Creation Rd. III, Science-based Industrial Park,
Hsinchu 30077, Taiwan R.O.C
E-mail : sales_ec@edge-core.com
www.edge-core.com

Powered by

Accton
Making Partnership Work

Michelangelo Buonaroti, Creation,
Ceiling of Sistine Chapel, 1508-1512
Dr. Thomas Fuller said: "Zeal without knowledge is fire without light."
For Edge-Core, we have both zeal and knowledge.

DS_WA520IM-CBL-3_V01
2005. 09.